Article number: P4D71AAM11100

Tube mounting fans

Multifan

Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	1435	RPM
Power consumption	P_e	1150	W
Nominal current	I_{nom}	3.9/2.2	A
Maximum current	I_{max}	4.3/2.5	A
Capacitor		-	µF/V
Ambient temperature	$T_{amb\ min/max}$	-25...40	°C
Insulation Class		CL.F	
IP Class Fan		IP55	
Sound pressure level (2 m)	$L_{p\ (meas.)}$	80	dB(A)
Sound pressure level (7 m)	$L_{p\ (calc.)}$	69	dB(A)
Weight		19.1	kg
Packing dimensions		720x720x400	mm

Fan details

Impeller blades	4
Impeller type	5
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	Yes
Intelligent Fan Drive	No

Characteristics

0 Pa	17500 m^3/h
150 Pa	13300 m^3/h

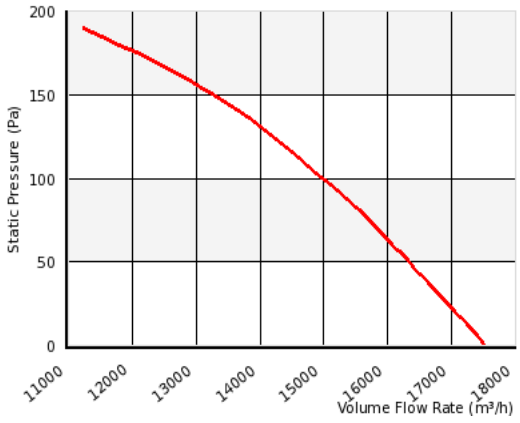



Please note: Picture may deviate from original product

Approval(s)

CE EAC

ErP 2020

Wiring diagram - Fan

BB01 - 3 Phase - Y connection - CCW



VOSTERMANS VENTILATION

Vostermans Ventilation B.V.
Venlo - The Netherlands
+31 (0)77 389 32 32
ventilation@vostermans.com

Vostermans Ventilation Inc.
Bloomington, IL - U.S.A.
+1 309 827 9798
ventilation@vostermansusa.com

Vostermans Ventilation Ltd. Co.
Shanghai - China
+86 21 5290 2889/2899
ventilation@vostermanschina.com

Vostermans Ventilation Sdn. Bhd.
Tmn Klang Jaya - Malaysia
+60 (0)33324 3638
ventilation@vostermansasia.com